



LNG

Fuel Tank Monitoring System



MUSASINO CO., LTD.

Head Office
1-2-15 MinamiYukigaya, Ota-ku, Tokyo, 145-0066
Tel.+81-3-3726-4413 Fax.+81-3-3726-1557
E-mail : sales@musasino.co.jp / service1@musasino.co.jp
<https://www.musasino.biz>

Distributor:

MUSASINO CO., LTD.

Musasino LNG Fuel Tank Monitoring System

Stricter environmental regulations are driving demand for LNG-fueled ships. As Japan's only manufacturer of high-precision and high-performance liquid level gauges, Musasino's radar type level gauge for LNG builds on our experience with LNG CTS and our unique technology.

Easy-to-Maintain All-in-One Structure

The all-in-one structure combines level sensors, temperature sensors, pressure sensors, and an independent level alarm in a compact housing. Each module is independent, and can be easily maintained under closed-tank conditions. The radar guide pipe is only 1-inch, keeping the weight and the amount of space needed within the tank to a minimum, making it applicable to both membrane and C-type tanks.

Self-Correction Function for Long-Term Operation


Each radar type level sensor has a built-in self-correction function, which allows for accurate, stable measurements over years of continuous operation.

Volume Calculation (Option)

Adding a high-precision electronic inclinometer and software to the system, the volume of LNG in the tank can be calculated from the level measurements, compensating for the inclination of the hull.

Density Monitoring (Option)

Musasino is able to provide software which monitors changes in density, which can help prevent LNG rollover.

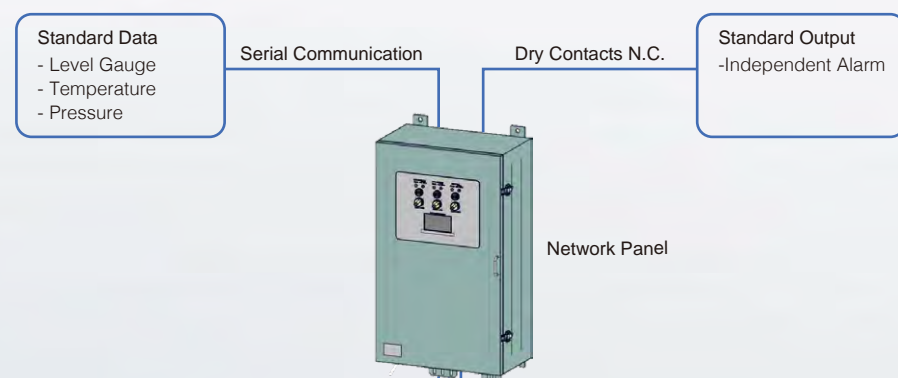

1-inch Radar Type Level Gauge
- Level Gauge x 2 Sets (Primary & Secondary)
- Temperature 4 Points x 2 Sets (Primary & Secondary)
- Pressure x 2 Sets (Max. 2 MPa) (Primary & Secondary)
Independent Alarm OF



Level Gauge

Application : LNG
Measurement Method : Frequency Modulated Continuous Wave (FMCW) Radar
Measurement Range : 0 m ~ 25 m
Accuracy : ± 5 mm
Intrinsically Safe Standard : Intrinsically Safe Explosion-proof Type Ex ia IIC T5
Protection Class : IP66

Temperature Sensor

Measurement Method : PT-100
Measurement Range : $-200 \sim 100^{\circ}\text{C}$
Accuracy : $\pm 0.2^{\circ}\text{C}$ ($-165^{\circ}\text{C} \sim -145^{\circ}\text{C}$)
 $\pm 1.5^{\circ}\text{C}$ ($-145^{\circ}\text{C} \sim +40^{\circ}\text{C}$)

Pressure Sensor

Measurement Method : Strain Gauge Type Diaphragm Pressure Gauge
Measurement Range : 0 bar to 20 bar
Accuracy : $\pm 0.5\%$ FS



Inclinometer (Option)

Measurement Method : Capacitive MEMS Sensor
Measurement Range : $\pm 5^{\circ}$
Accuracy : $\pm 0.05^{\circ}$